




Magna Lock® blind rivets



The Magna Lock® is a high-strength blind rivet that remains snug even under dynamic load. Holes can be prepared to ensure joints are water and airtight. The mandrel always breaks flush, even when materials of varying strengths and thicknesses are present within the grip range. The blind-side footprint is minimal. The grip range is large.



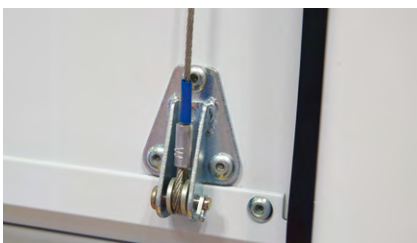


Applications

- General industry
- Automotive industry
- Construction industry
- Bodywork and vehicle manufacture

Benefits at a glance

- Universal use
- The mandrel draws itself into the sleeve, causing the sleeve to widen and completely fill the bore hole; ideal for dynamic loads.
- Mandrel always breaks off flush at the snap head
- Large grip range
- The securely fitting mandrel makes for vibration-resistant applications
- Combines various materials such as metals and plastics
- Quick and secure installation
- Permanent secure fixing
- Heatless installation means component will not warp.
- Eliminates extensive refinishing

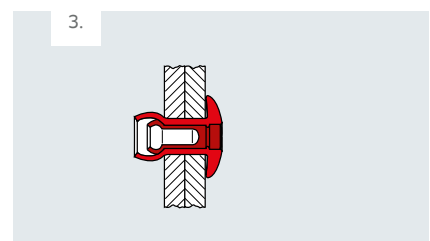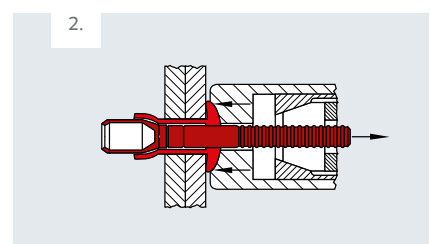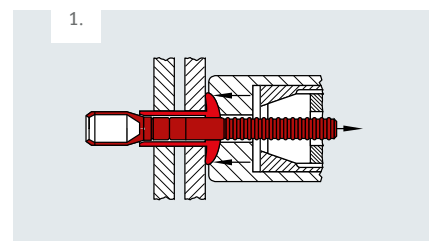



Magna Lock® blind rivets

Truss head


Material

Sleeve

Steel SAE 1006/1020M,
galvanised chromated

Mandrel

Steel AISI 10B21,
galvanised chromated



Nominal \varnothing d [mm]	Bore \varnothing [mm]	Grip range s [mm]	Blind sleeve l ± 0.3 [mm]	Blind rivet head		Nominal strength at break*		Article No.
				\varnothing dk ± 0.4 [mm]	Height k ± 0.3 [mm]	Shear N	Tensile N	
4.8	4.9 - 5.1	1.6 - 6.9	10.5	9.6	2.1	5780	4440	415 810 900
		5.4 - 11.1	14.5	9.6	2.1	5780	4440	415 811 900
		1.6 - 11.1	14.5	9.6	2.1	5780	4440	415 812 900
6.4	6.6 - 6.9	2.0 - 9.5	14.2	13.0	2.8	10790	8220	415 820 900
		8.9 - 15.9	20.5	13.0	2.8	10790	8220	415 821 900
		2.0 - 15.9	20.5	13.0	2.8	10790	8220	415 822 900
9.8	10.0 - 10.4	3.0 - 15.9	21.3	19.6	4.5	26680	17790	415 890 900
		15.8 - 28.5	35.4	19.6	4.5	26680	17790	415 891 900
12.7	13.5 - 14.3	4.1 - 19.0	28.5	26.7	6.0	49820	41810	415 893 000

* Strengths at break relate to rivet failure.

Other designs available on request.

Magna Lock® blind rivets



Large truss head


Material

Sleeve

Steel SAE 1006/1020M,
galvanised chromated

Mandrel

Steel AISI 10B21,
galvanised chromated

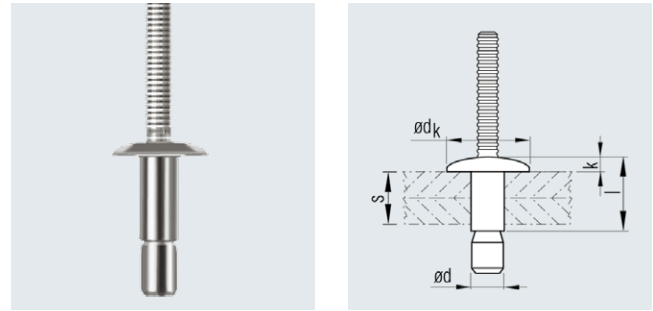

Nominal \varnothing d [mm]	Bore \varnothing [mm]	Grip range s [mm]	Blind sleeve $l \pm 0.3$ [mm]	Blind rivet head		Nominal strength at break*		Article No.
				\varnothing $dk \pm 0.5$ [mm]	Height $k \pm 0.3$ [mm]	Shear N	Tensile N	
4.8	4.9 - 5.1	1.6 - 6.8	10.5	13.0	2.2	5780	4440	415 815 900
		5.4 - 11.1	14.5	13.0	2.2	5780	4440	415 816 900
6.4	6.6 - 6.9	2.0 - 9.5	14.2	14.5	3.0	10790	8220	415 825 900

* Strengths at break relate to rivet failure.

Other designs available on request.




Magna Lock® blind rivets

Countersunk 100°

Material

Sleeve
Steel SAE 1006/1020M,
galvanised chromated

Mandrel
Steel AISI 10B21,
galvanised chromated

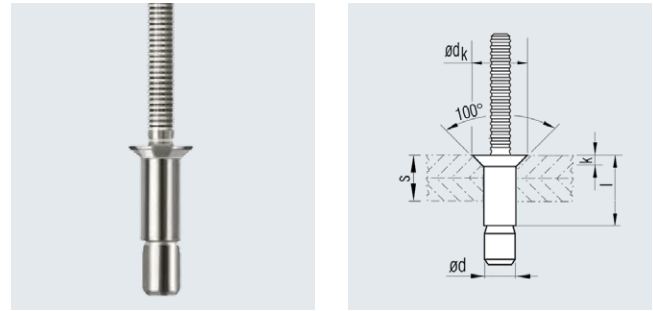

Nominal \varnothing d [mm]	Bore \varnothing [mm]	Grip range s [mm]	Blind sleeve l ± 0.3 [mm]	Blind rivet head		Nominal strength at break*		Article No.
				\varnothing dk ± 0.4 [mm]	Height k ± 0.3 [mm]	Shear N	Tensile N	
4.8	4.9 - 5.1	3.2 - 8.4	12.3	8.6	1.8	5780	4440	415 850 900
		7.8 - 12.7	16.6	8.6	1.8	5780	4440	415 851 900
6.4	6.6 - 6.9	4.1 - 12.1	16.8	10.0	2.0	10790	8220	415 860 900
		10.5 - 18.4	23.1	10.0	2.0	10790	8220	415 861 900

* Strengths at break relate to rivet failure.

Other designs available on request.

Magna Lock® blind rivets



Truss head


Material

Sleeve

Aluminium AA 5056,
chromated

Mandrel

Aluminium AA 7075,
chromated



Nominal \varnothing d [mm]	Bore \varnothing [mm]	Grip range s [mm]	Blind sleeve l ± 0.3 [mm]	Blind rivet head		Nominal strength at break*		Article No.
				\varnothing dk ± 0.4 [mm]	Height k ± 0.3 [mm]	Shear N	Tensile N	
4.8	4.9 - 5.1	1.6 - 6.9	10.5	9.6	2.1	2690	2220	415 830 900
		5.4 - 11.1	14.5	9.6	2.1	2690	2220	415 831 900
		1.6 - 11.1	14.5	9.6	2.1	2690	2220	415 832 900
6.4	6.6 - 6.9	2.0 - 9.5	14.2	13.0	2.8	5800	4000	415 840 900
		2.9 - 15.9	20.5	13.0	2.8	5800	4000	415 841 900
		2.0 - 15.9	20.5	13.0	2.8	5800	4000	415 842 900
		14.7 - 22.2	26.9	13.0	2.8	5800	4000	415 946 900
9.5	10.0 - 10.4	3.1 - 15.9	21.3	19.6	4.5	13220	8450	415 895 900

* Strengths at break relate to rivet failure.

Other designs available on request.




Magna Lock® blind rivets

Large Truss Head

Material

Sleeve
Aluminium AA 5056,
chromated

Mandrel
Aluminium AA 7075,
chromated

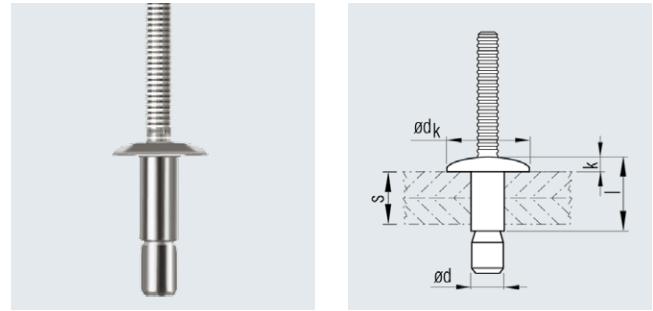

Nominal \varnothing d [mm]	Bore \varnothing [mm]	Grip range s [mm]	Blind sleeve l ± 0.3 [mm]	Blind rivet head \varnothing dk ± 0.5 [mm]	Height k ± 0.3 [mm]	Nominal strength at break*		Article No.
						Shear N	Tensile N	
4.8	4.9 - 5.1	5.4 - 11.1	14.5	13.0	2.2	2690	2200	415 836 900

* Strengths at break relate to rivet failure.

Other designs available on request.

Magna Lock® blind rivets




Countersunk 100°

Material

Sleeve
Aluminium AA 5056,
chromated

Mandrel
Aluminium AA 7075,
chromated

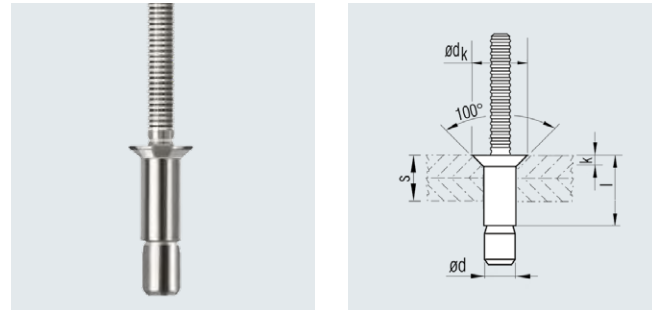

Nominal \varnothing d [mm]	Bore \varnothing [mm]	Grip range s [mm]	Blind sleeve l ± 0.3 [mm]	Blind rivet head		Nominal strength at break*		Article No.
				\varnothing dk ± 0.4 [mm]	Height k ± 0.3 [mm]	Shear N	Tensile N	
4.8	4.9 - 5.1	3.2 - 8.4	12.3	8.6	1.8	2690	2220	415 870 900
		7.8 - 12.7	16.6	8.6	1.8	2690	2220	415 871 000
6.4	6.6 - 6.9	4.1 - 12.1	16.7	10.0	2.0	5800	4000	415 880 900
		10.5 - 18.4	23.1	10.0	2.0	5800	4000	415 881 900

* Strengths at break relate to rivet failure.

Other designs available on request.



Magna Lock® blind rivets

Truss head

Material


Sleeve

Stainless steel AISI 302/304,
passivated



Mandrel

Stainless steel AISI 305/304



Nominal \varnothing d [mm]	Bore \varnothing [mm]	Grip range s [mm]	Blind sleeve l ± 0.3 [mm]	Blind rivet head		Nominal strength at break*		Article No.
				\varnothing dk ± 0.4 [mm]	Height k ± 0.3 [mm]	Shear N	Tensile N	
4.8	4.9 - 5.1	1.6 - 6.9	10.5	9.6	2.1	5780	4200	415 910 000
		5.4 - 11.1	14.5	9.6	2.1	5780	4200	415 911 000
6.4	6.6 - 6.9	2.0 - 9.5	14.2	13.0	2.8	10500	8000	415 920 000
		8.9 - 15.9	20.5	13.0	2.8	10500	8000	415 921 000

* Strengths at break relate to rivet failure.

Other designs available on request.



Magna Lock® blind rivets

Countersunk 100°

Material


Sleeve

Stainless steel AISI 302/304,
passivated



Mandrel

Stainless steel AISI 305/304



Nominal \emptyset d [mm]	Bore \emptyset [mm]	Grip range s [mm]	Blind sleeve l ± 0.3 [mm]	Blind rivet head		Nominal strength at break*		Article No.
				\emptyset dk ± 0.4 [mm]	Height k ± 0.3 [mm]	Shear N	Tensile N	
4.8	4.9 - 5.1	3.2 - 8.4	12.3	8.6	1.8	5780	4200	415 950 000
		7.8 - 12.7	16.6	8.6	1.8	5780	4200	415 951 000
6.4	6.6 - 6.9	4.1 - 12.1	16.7	10.0	2.0	10500	8000	415 960 000
		10.6 - 18.4	23.0	10.0	2.0	10500	8000	415 961 000

* Strengths at break relate to rivet failure.

Other designs available on request.