



Attachment head

Attachment head for RL15A and RL20A


Benefits at a glance

- Tensile force of up to 10 kN
- With spent mandrel extractor

Technical specifications

Nose cap ø:	19.5 mm
Overall length:	approx. 160 mm
Weight:	approx. 0.8 kg
Article No.	431 837 000

Nose cap and nose available in special designs on request.

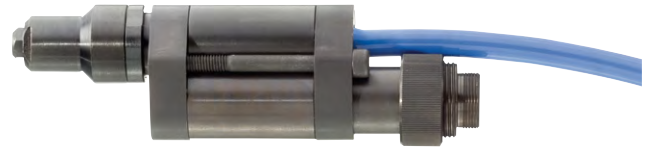


Mandrel remover


Features

- Hose length 4 m
- Extraction hose for blind rivet installation tools

For tool	Article No.
RL 20A	431 825 000
RL 40I / 60I / 60IHV / 75	431 826 000



431 825



431 826

Angled screw coupling

Benefits at a glance

- Usable for RL 40I / RL 60I / RL 60IHV and RL 75
- For confined spaces so that the spent mandrel container can be fitted at an angle

Article No. 431 701 000



Ring sensor

Counts the extracted spent mandrels.

Benefits at a glance

- Retrofittable
- Hose adapter also available
- Readings via external counter
- Easy installation

Technical specifications

Supply voltage:	10 - 30 V DC
Output voltage:	10 - 30 V DC
Maximum output current:	80 mA
Standby current at 24V:	11 mA
Signal duration (min.):	500 ms
Operating temperature:	10 - 40 °C
Dimensions for 431 357 000:	118 x 53 mm
Dimensions for 431 826 000:	139 x 53 mm



Scope of delivery

For tool	Article No.
RL 20A	431 357 000
RL 40I / RL 60I / RL 60IHV	431 784 000

Connector for spent mandrel extraction by hose included with delivery.

Accessories

Description	Article No.
Adapter for spent mandrel extractor per hose	431 826 000
Mandrel container	431 356 870