



POP® soft special blind rivets

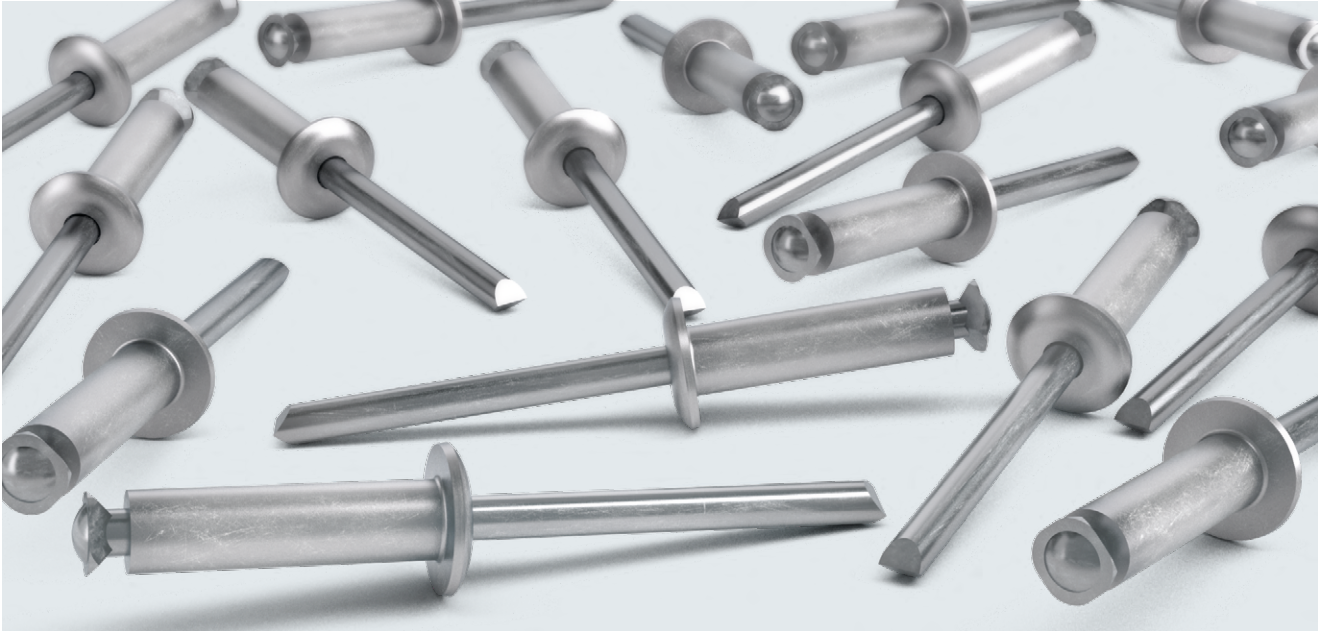

POP soft special blind rivets are especially suited to hard/soft connections. For example, in bodywork and vehicle construction, insulation technology, interior fittings, or even in the automotive and construction industries. As the rivet sleeve splits into 4 parts, the rivet claws its way into the soft material on its blind side, thereby ensuring that the load is more evenly distributed. The high clamp force makes for a tight connection. Suitable for large drill hole tolerances on the blind side. POP® soft special blind rivets are thus very suited for joining wood, hardboard, plastic, fiberglass and similar materials.

Sample applications




- General industry
- Insulation technology
- Interior fittings
- Bodywork and vehicle manufacture
- Automotive industry
- Building industry

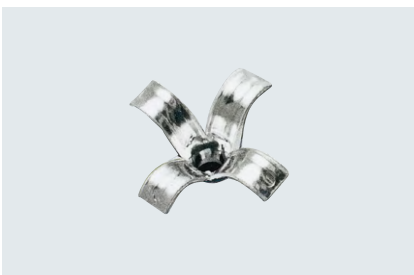

Large blindside footprint

Benefits at a glance

- Ideal for “hard/soft” connections, such as FRP or insulating material
- Can be used on extra-large drilled holes
- Universal use
- Quick and secure installation
- Permanent secure fixing
- Heatless installation means component will not warp
- Eliminates extensive refinishing

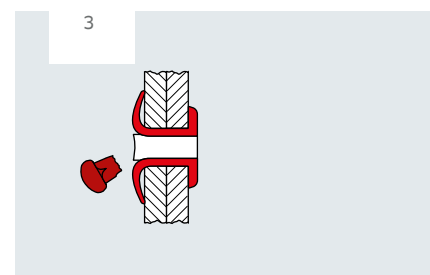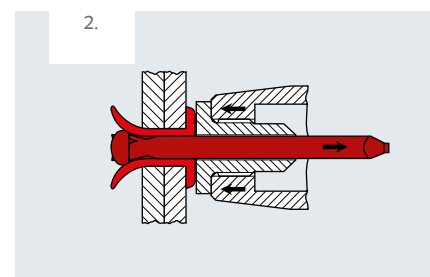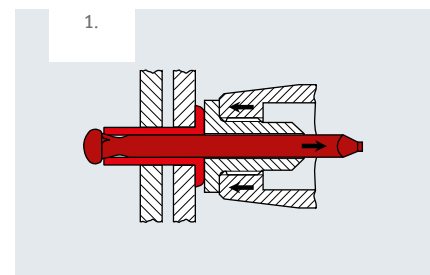




POP® soft special blind rivets

Truss head

Material

■ Sleeve:
Aluminum AlMg5

■ Mandrel:
Steel, galvanised

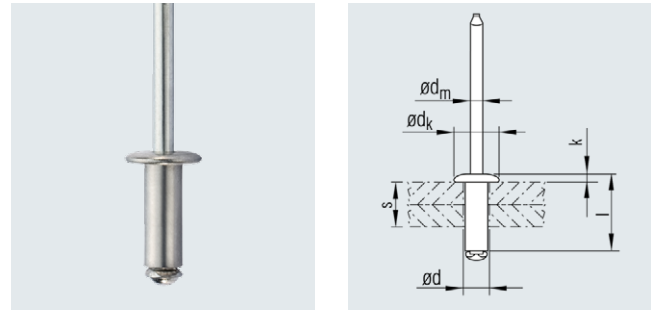

Nominal \varnothing d [mm]	Bore \varnothing [mm]	Grip range s [mm]	Blind sleeve l ± 0.5 [mm]	Blind rivet head		Mandrel \varnothing d _m nom. [mm]	Nominal strength at break		Article No.
				\varnothing dk ± 0.4 [mm]	Height k max [mm]		Shear [N]	Tensile [N]	
3.2	3.6 - 3.7	1.5 - 6.0	10.0	6.5	1.2	1.8	800	800	300 393 000
		5.0 - 9.0	13.4	6.5	1.2	1.8	800	800	300 395 000
4.0	4.4 - 4.5	1.0 - 6.0	10.5	8.0	1.4	2.5	1000	1000	300 493 000
		5.0 - 9.0	14.0	8.0	1.4	2.5	1000	1000	300 495 000
		8.0 - 14.0	19.5	8.0	1.4	2.5	1000	1000	300 499 000
4.8	5.2 - 5.3	1.0 - 6.0	11.1	9.5	1.6	2.6	2000	2000	300 593 000
		5.0 - 9.0	14.7	9.5	1.6	2.6	2000	2000	300 595 000
		8.0 - 14.0	19.1	9.5	1.6	2.6	2000	2000	300 598 000
		14.0 - 20.0	25.4	9.5	1.6	2.6	2000	2000	300 599 000

* Strengths at break relate to rivet failure.

Other designs available on request.

Note

Rivet head larger than rivet shaft diameter!
Rivet shaft breakoff depends on the nature and/or strength of the component being installed.
The maximum grip ranges shown depend on the type and nature of the component being installed.




POP® soft special blind rivets

Large truss head

Material

■ Sleeve: Aluminum AlMg 3/3.5
■ Mandrel: Steel, galvanised

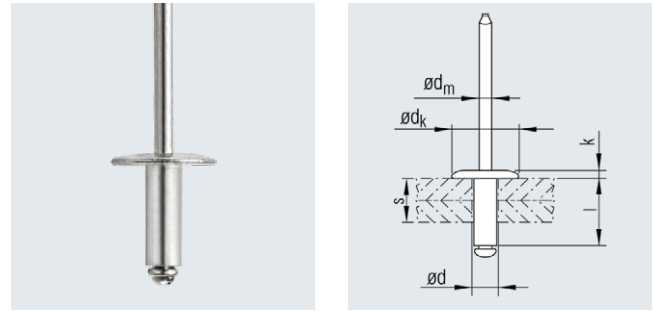

Nominal \varnothing d [mm]	Bore \varnothing [mm]	Grip range s [mm]	Blind sleeve $l \pm 0.5$ [mm]	Blind rivet head		Mandrel \varnothing d_m nom. [mm]	Nominal strength at break		Article No.
				\varnothing $dk \pm 0.5$ [mm]	Height k max [mm]		Shear [N]	Tensile [N]	
4.0	4.4 - 4.5	1.0 - 5.5	10.5	12.1	1.6	2.5	1000	1000	300 901 000
4.8	5.2 - 5.3	14.0 - 20.0	25.6	14.0	2.0	2.6	2000	2000	300 996 000

* Strengths at break relate to rivet failure.

Other designs available on request.

Note

Rivet head larger than rivet shaft diameter!
 Rivet shaft breakoff depends on the nature
 and/or strength of the component being installed.
 The maximum grip ranges shown depend on the
 type and nature of the component being installed.